


Leak Controller™


a Specialized, Affordable Water Alarm and Shut-off System

THE FIRST LINE OF DEFENSE AGAINST WATER DAMAGE

Upon sensing moisture, Leak Controller will engage the shut-off valve and sound an alarm. The water source is cut off, stopping the leak while the alarm continues to sound until the valve is manually reset. By preventing continuous water flow, mold and property damage are restricted and user liability is reduced. Leak Controller is designed for simple installation and operation.

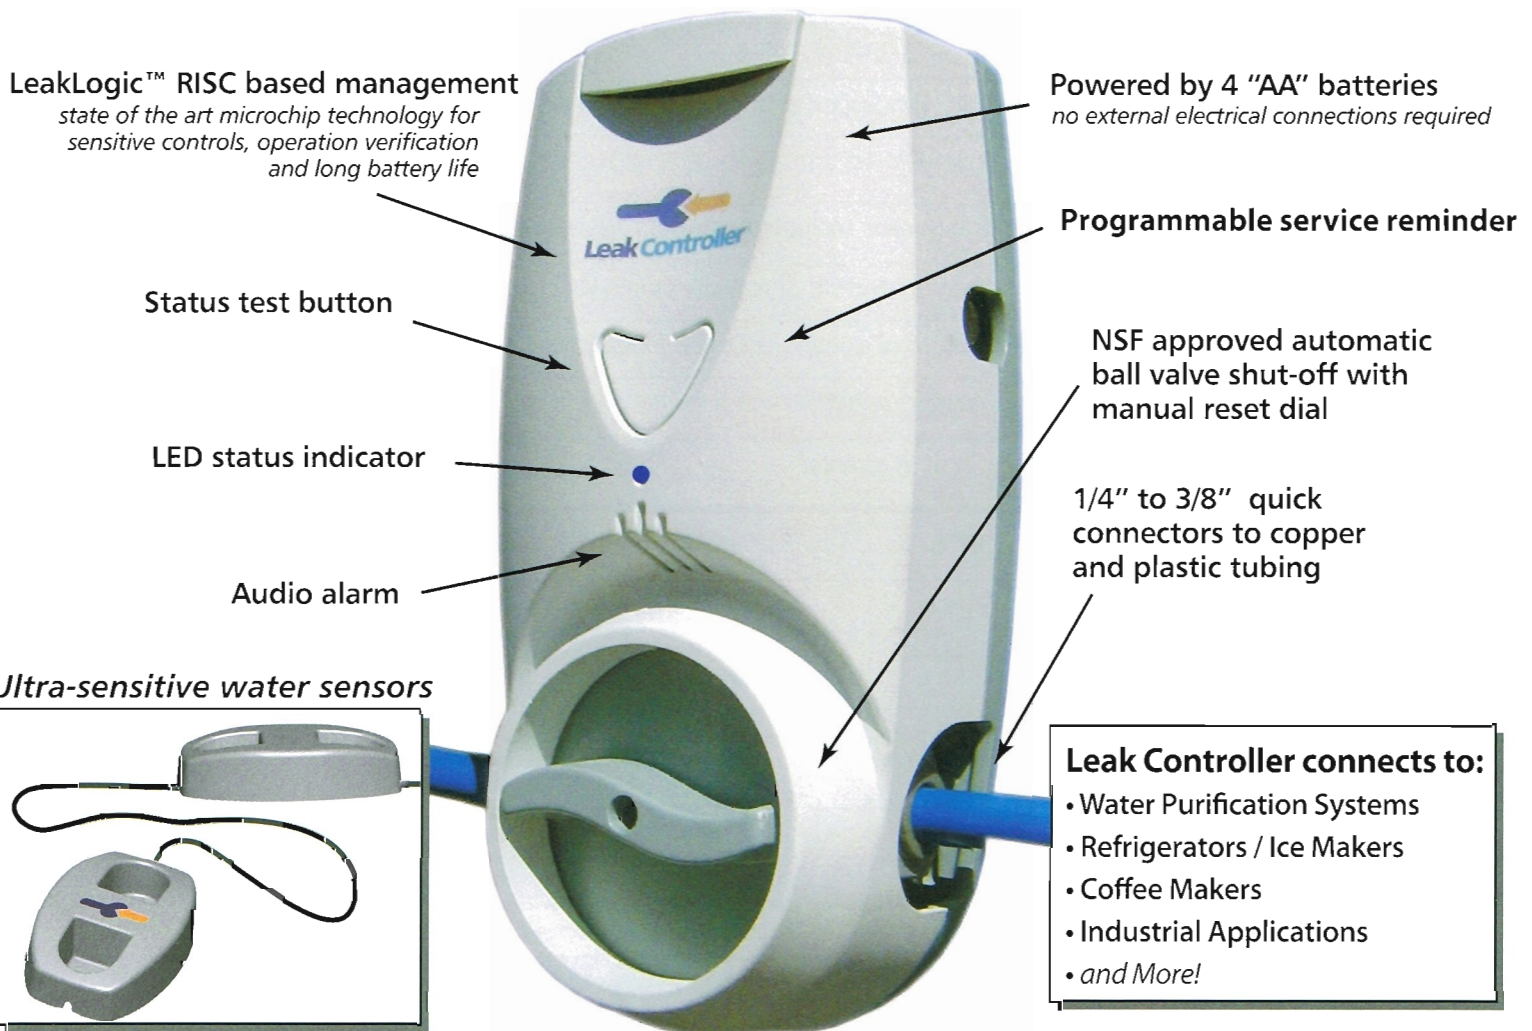

Ultra-sensitive water sensors

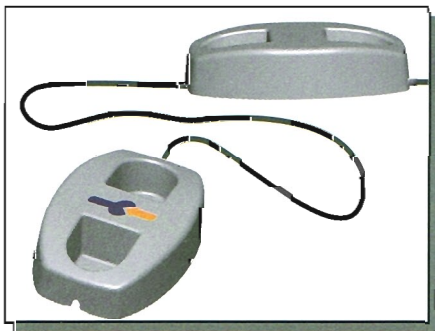


Connected to one controller, multiple sensors can be "daisy-chained" together for increased coverage and protection in multiple areas.


Two screw mounting plate allows for quick and simple installation




Smart Shut-off Valve



Install in Minutes



Instant Set-up



Easy Test

Features and Included Items LCS Series

Made-in-USA Quick-Connection NSF Approved Ball Valve with Auto Shut-off with Maximum Water Temperature to 140° F
Available Valve to Tubing Connection Sizes: 1/4", 3/8" for Plastic and Copper Tubing
Audio and Blue LED Indicators
LeakLogic™ RISC Based Logic Control
Stainless Steel 2 Screw Mounting Plate with Hardware
Sensor Contacts Stainless Steel Plated
4 "AA" Alkaline Batteries for Extended Operation
Pull-Out Battery Holder for Convenient Battery Replacement
Sensor Towel
Built with Superior Impact Resistant ABS Plastic
Built with Reinforced Nylon and Glass Materials on Stressed Components
One Sensor Included with Coin Test Slot and Series Connectors
Water Detection Sensitivity Down to 2 ppm TDS (total dissolved solids)
Conformal Coating on the Printed Circuit Board
Programmable Service Reminder Indicator
1 Year Warranty

Power	4 "AA" size alkaline type batteries
Sensor	Electromechanical dual probe with series connectors
Temperature	System operating range: 40° F to 100° F Water operating range: 36° F to 140° F
Size & Weight	6.75" (H) 3.25" (W) 2.5" (D) .90 lbs. with batteries
Solenoid	6V DC Push-Type
Alarm	85+dB at 5' @ 3.4± 0.5 kHz pulsing alarm
LED	Blue
Mounting	Accessories and bracket supplied for wall mounting
Battery Replacement	Replace annually or upon low battery indicator
Warranty	1 year limited warranty from date of purchase against defects in material and workmanship

This product does not guarantee the prevention of water damage.
 Many factors increase the probability of preventing water damage including:
 Constant Leak Controller testing / Physical verification of all parts / Correct placement of the sensor(s)

