



PLEKX[®]
Composite Web

10



Sediment, Chlorine Taste & Odor Reduction Filter

FEATURES & BENEFITS

- 5 µm Nominal Filtration*
- High Chlorine Taste and Odor Reduction*
- Efficient Sediment Filter with Large Dirt-Holding Capacity*
- Spiral Wound



TYPICAL USAGES

PLEKX[®] 10 filters provide previously unattainable performance at the lowest price point. PLEKX[®] 10 filters simultaneously remove chlorine taste and odor and organic chemicals that contribute to taste and odor while providing the particulate filtration and dirt-holding capacity of an efficient 5 µm sediment filter. These filters are optimized for applications where they perform the role of both a sediment and activated carbon filter.

TECHNICAL SPECIFICATIONS AND ORDER INFORMATION


Part No.	O.D. x Length (nominal)	Weight	Chlorine Taste & Odor Reduction Capacity @ Flow*	Nominal µm Rating*	Initial ΔP @ Flow*
P10-250-109-096	2.50" x 9.75" 63.5 mm x 247.7 mm	0.45 lbs. 0.20 kg	>2,500 gal. @ 1.0 GPM >9,000 L @ 3.8 LPM	5 µm	<2.0 psid @ 1.0 GPM <0.14 bar @ 3.8 LPM

* Based on Manufacturer's Internal Testing

KX[®]'s proprietary extrusion process allows the production of a carbon-particle laminate with more carbon than conventional PAC spiral-wound filters. This enables the PLEKX[®] 10 filter to deliver extended life while removing sediment, chlorine taste and odor and organic contaminants from water, aqueous solutions or suspensions.

The PLEKX[®] 10 is ideal for use in residential and commercial water purification systems, food service, pre- and post-RO systems.



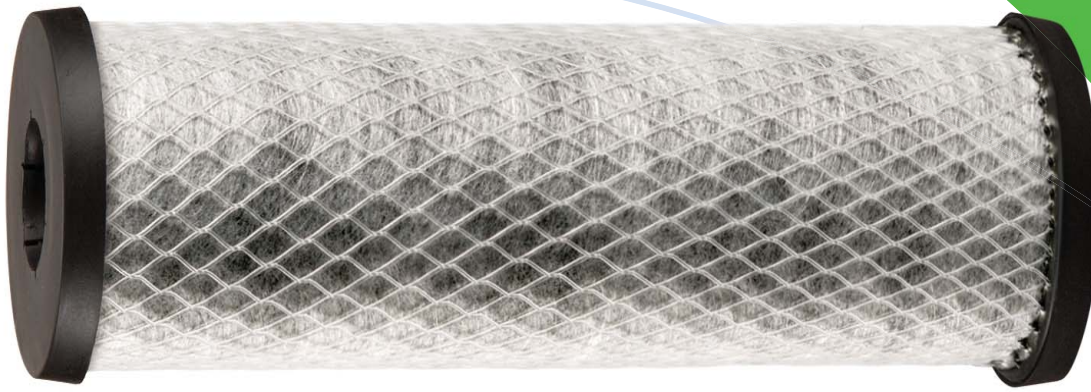

10



ORDER INFORMATION

Standard filters are manufactured using a polypropylene spunbonded prefiltration medium. A protective polypropylene netting is applied to the exterior of the cartridge. Elastomeric end caps that engage most standard industrial filter housings are standard. Inquire concerning alternative filter finishing options, including alternative end cap and housing interface styles.

EXTRUDED CARBON = EXCEPTIONAL VALUE

PLEKX® 10 filters consist of activated carbon particles fused into a uniform film and supported using light polypropylene non woven webs. PLEKX® 10 filters flow in a radial (outside-to-inside) direction, providing increased dirt-holding capacity and low pressure drop. Unlike granular activated carbon (GAC) filters, PLEKX® 10 cartridges will not channel or bypass due to the extreme uniformity of their extruded activated carbon medium. Service life of the PLEKX® 10 filter is greatly extended by depth filtration through multiple layers of polypropylene spunbonded filtration medium.

- No channeling
- No fluidizing
- No bypassing
- Lowest extractables, pure materials of construction
- Maximum service life and resistance to fouling
- Graded density prefiltration design
- Manufactured using FDA-compliant materials

IMPORTANT NOTICE: Performance claims are based on a complete system, including a filter, housing, and connection to a pressurized water source. This filter must be placed in an appropriate system, and operated according to the system's specifications in order to deliver the claimed performance. It is essential to follow operational, maintenance, and filter replacement requirements, as directed for each application, for this filter and system to perform correctly. Read the Manufacturer's Data Sheet accompanying the system and change the filter as suggested. The contaminants or other substances removed or reduced by this water filter are not necessarily in all users' water.

NOTES

1. Projected chlorine taste and odor reduction capacity when tested in accordance with NSF/ANSI Standard 42 protocol.
2. Nominal particulate rating (5 µm) is for >85% of a given size as determined from single-pass particle counting results.*
3. Absolute particulate rating (10 µm) is for >99.9% of particles of a given size as determined from single-pass particle counting results.**

* Nominal Filter Rating: Filter rating indicating the approximate size particle, the majority of which will not pass through the filter. It is generally interpreted as meaning that 85% of the particles of the size equal to the nominal micron rating will be retained by the filter. (WQA Glossary of Terms, Third Edition, 3-97).

** Absolute Filter Rating: Filter rating meaning that 99.9% (or essentially all) of the particles larger than a specific micron rating will be trapped on or within the filter. (WQA Glossary of Terms, Third Edition, 3-97).

WARNINGS

Maximum Operating Temperature: 125°F/51.67°C Maximum Operating Pressure: 250 psig/17.24 bar Maximum Differential Pressure: 100 psid/6.895 bar Collapse Pressure: 200 psid/13.79 bar

PLEKX® 10 filters are not to be autoclaved or steam-sterilized. Use PLEKX® 10 carbon filters only with microbiologically safe and adequately disinfected water. Activated carbon filters are not designed to kill or remove bacteria or viruses. Actual results obtained will vary with various combinations of organic contaminants, changes in pH or other conditions encountered in actual use. All information presented here is based on data believed to be reliable. It is offered for evaluation and verification, but is not to be considered a warranty of any kind.

PLEKX® 10 filters are designed to fit most standard household and commercial or industrial housings. Contact KX Technologies LLC to check filter housing compatibility. This cartridge must be placed in an appropriate housing and flushed for a minimum of 5 minutes prior to use.

LIMITED LIABILITY

KX Technologies LLC makes no warranties of any kind, expressed or implied, statutory or otherwise, and expressly disclaims all warranties of every kind, concerning the product, including, without limitation, warranties of merchantability and fitness for a particular purpose, except that this product should be capable of performing as described in this product's data sheet. KX Technologies LLC's obligation shall be limited solely to the refund of the purchase price or replacement of the product proven defective, in KX Technologies LLC's sole discretion. Determination of suitability of this product for uses and applications contemplated by Buyer shall be the sole responsibility of Buyer. Use of this product constitutes Buyer's acceptance of this Limited Liability.

MADE IN THE U.S.A.
DISTRIBUTED BY:



269 South Lambert Road • Orange, CT 06477-3502 • Telephone: 203-799-9000 • Fax: 203-799-7000 • E-mail: sales@kxtech.com

This product is covered by one or more of the following United States Patent Nos. 5,019,311; 5,147,722; 5,792,513; 6,077,588; 6,355,330; 6,485,813; 6,550,622; 6,719,869; 6,797,167; 7,238,403; applicable US patent applications; foreign patents and applicable foreign patent applications.

©2008 KX Technologies LLC. All rights reserved. KX, the KXT logo, PLEKX, the PLEKX COMPOSITE WEB seal, and the PLEKX WATER FILTERS seal are registered trademarks of KX Technologies LLC.

www.kxtech.com

10/21/08