

AQUAGATE CX

Water Alarm and Shut-off System

THE FIRST LINE OF DEFENSE AGAINST WATER DAMAGE

Appliances
Hot Water Heaters

Water Softeners
Commercial Water Systems



- Valve open, close, and status buttons
- Audio alarm
- Powered by 4 "AA" batteries with minimum 2 year life
- 1" - full-port electric ball-valve


Ultra-sensitive water sensors
Up to 4 sensors can be directly connected to the control panel.
Unlimited sensors may be "daisy-chained" together for increased coverage and protection in multiple areas.



WaterController
PRODUCTS

www.watercontrollerinc.com

AquaGate, LeakLogic, the AquaGate logo, Water Controller Products and the Water Controller Products Logo are trademarks of Water Controller Products. AquaGate is Patent Pending

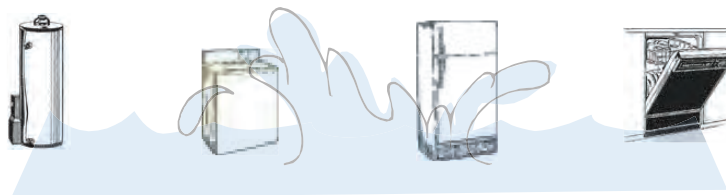


"Water damage, the number one homeowner's insurance claim, costs insureds and insurers more every year than fire, storms, or theft." (Claims Magazine October 2005)

"A home with a record of water claims may be uninsurable!" (MONEY Magazine 2003)



Instant Open/Close
Shut-off Valve



1" Full Port Valve for
All Applications



Instant Set-up



Easy Test

Operation: Upon sensing moisture, the Aquagate will engage the shut-off valve and sound an alarm. The water source is cut off, stopping the leak while the alarm continues to signal until the unit is reset.

Features and Included Items CX-Series	
1" - Full Port Ball Valve with Auto Shut-off	
Programmable Service Reminder Indicator	
Water Detection Sensitivity Down to 2 ppm TDS (total dissolved solids)	
LeakLogic™ RISC Based Logic Control	
4 "AA" Alkaline Batteries for Extended Operation with Low Battery Indication	
Automatic Daily Valve Management	
Power	4 "AA" size alkaline type batteries
Sensor	Electromechanical dual probe with series connectors
Temperature	System operating range: 33° F to 140° F Water operating range: 33° F to 210° F
Size & Weight	6.00" (H) 3.45" (W) .75" (D) (Panel) 2.5 lbs. with batteries
Valve	1" - Full Port Brass Ball Valve, 6V DC
Alarm	85+dB at 5' @ 3.4± 0.5 kHz pulsing alarm
LED	Blue, Green, Red
Mounting	Accessories supplied for wall mounting
Battery Replacement	Replace every 2 years or upon low battery indicator
Warranty	2 year limited warranty from date of purchase against defects in material and workmanship

This product does not guarantee the prevention of water damage.
Many factors increase the probability of preventing water damage including:
Constant AquaGate testing / Physical verification of all parts / Correct placement of the sensor(s)

WaterController
PRODUCTS
www.watercontrollerinc.com