

PMF SERIES PANEL MOUNT FLOWMETERS PMF-A SERIES ADJUSTABLE PANEL MOUNT INF SERIES INLINE FLOWMETER

- Solid One piece Injection Molded Acrylic Body
- Stainless Steel Float and Internals

PANEL MOUNT FLOWMETERS PMF-A SERIES ADJUSTABLE PANEL MOUNT FLOWMETERS INF SERIES INLINE FLOWMETERS

LIQUATEC PMF / PMF-A / INF SERIES FLOWMETERS

Are of consistent quality with unparalleled endurance. Utilizing our experience in Engineering and Injection Molding, we have developed a low cost, competitive, and highly consistent quality product. Our product reduces the chances of human error often associated with handmade machined products.


LIQUATEC PMF / PMF-A / INF SERIES FLOWMETERS

Have easy-to-read scales, silk-screened onto the acrylic bodies, that are extremely accurate. With our durable, attractive, low cost construction, and practically unbreakable bodies, you will soon make these your flowmeters of choice.





PMF SERIES PMF-A SERIES INF SERIES

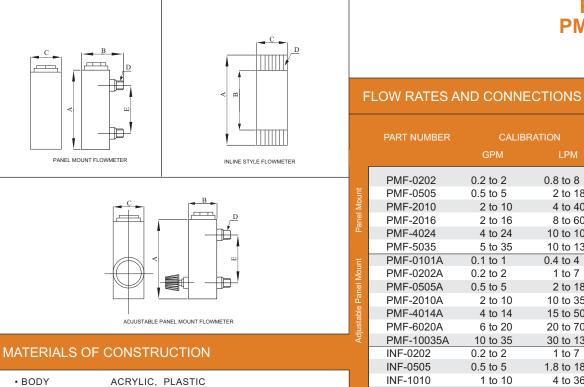

	PART NUMBER	CALIBF	RATION	ADAPTER SIZE
		GPM	LPM	
unt	PMF-0202	0.2 to 2	0.8 to 8	3/8" MNPT
	PMF-0505	0.5 to 5	2 to 18	1/2" MNPT
δ	PMF-2010	2 to 10	4 to 40	3/4" MNPT
Panel Mount	PMF-2016	2 to 16	8 to 60	1" MNPT
ڞ	PMF-4024	4 to 24	10 to 100	1" MNPT
	PMF-5035	5 to 35	10 to 130	1" MNPT
	PMF-0101A	0.1 to 1	0.4 to 4	1/4" MNPT
Adjustable Panel Mount	PMF-0202A	0.2 to 2	1 to 7	3/8" MNPT
nel	PMF-0505A	0.5 to 5	2 to 18	1/2" MNPT
Ра	PMF-2010A	2 to 10	10 to 35	3/4" MNPT
able	PMF-4014A	4 to 14	15 to 50	1" MNPT
just	PMF-6020A	6 to 20	20 to 70	1" MNPT
Ρq	PMF-10035A	10 to 35	30 to 130	1" MNPT
	INF-0202	0.2 to 2	1 to 7	1/2" FNPT
	INF-0505	0.5 to 5	1.8 to 18	1/2" FNPT
	INF-1010	1 to 10	4 to 36	3/4" FNPT
	INF-2020	2 to 20	10 to 70	1" FNPT
InLine Styl	INF-5030	5 to 30	20 to 110	1" FNPT
	INF-20060M	20 to 60	80 to 220	1-1/2" MNPT
	INF-200100	20 to 100	80 to 360	2" FNPT
	INF-400120	40 to 120	150 to 450	2" FNPT
	INF-500150	50 to 150	190 to 550	2" FNPT
	INF-600200	60 to 200	220 to 750	2" FNPT

DIMENSIONAL DATA

TEMP RATING

EPDM • CONNECTIONS POLYPROPYLENE

120°F

• MAX PRESSURE 120 PSI (827KPA)

304 STAINLESS STEEL

304 STAINLESS STEEL

(34C)

• ORINGS

• GUIDE

• FLOAT

MODEL	A (INCH)	B (INCH)	C (INCH)	E (INCH)	
PMF-0202	8.11	2.75	1.26	6.50	
PMF-0505	8.11	2.75	1.26	6.50	
PMF-2010	8.66	3.66	1.54	6.50	
PMF-2016	8.66	3.66	1.54	6.50	
PMF-4024	9.44	3.86	1.73	6.89	
PMF-5035	9.44	3.86	1.73	6.89	
PMF-0101A	6.61	1.37	1.26	5.00	
PMF-0202A	6.61	1.37	1.26	5.00	
PMF-0505A	6.61	1.37	1.26	5.00	
PMF-2010A	8.89	1.81	1.77	6.30	
PMF-4014A	8.89	1.81	1.77	6.30	
PMF-6020A	8.89	1.81	1.77	6.30	
PMF-10035A	8.89	1.81	1.77	6.30	
INF-0202	8.26	7.09	1.26		
INF-0505	8.26	7.09	1.26		
INF-1010	10.94	9.29	1.77		
INF-2020	10.43	9.25	2.01		
INF-5030	10.43	9.25	2.01		
INF-20060M	12.05	9.25	2.01		
INF-200100	14.96	10.63	2.95		
INF-400120	14.96	10.63	2.95		
INF-500150	14.96	10.63	2.95		
INF-600200	14.96	10.63	2.95		



Flowmeters are tested and calibrated for water only. Although may be suitable for other liquids, Liquatec will not guarantee them.

DISTRIBUTED BY:



2133 S. Green Privado Ontario, CA 91761 USA Sales@Liquatec.com www.Liquatec.com