

FH09 SERIES NARROW FILTER HOUSINGS

- Accepts 2.5" Nominal 10" Length Cartridges Opaque Housings are NSF Listed
- 1/4", 3/8" and 1/2" Female NPT Ports Standard
- Optional 3/8" Quick Connect Ports are Available

FH09 SERIES FILTER HOUSINGS

LIQUATEC FH09 SERIES NARROW FILTER HOUSINGS

are manufactured of reinforced polypropylene, Clear, FDA approved Styrene-Acrylonitrile or Lexan material for 2.5" diameter cartridges. Most 9 7/8" and 10" length cartridges fit easily. Caps are available in 1/4" 3/8" and 1/2" Female NPT ports. Optional 3/8" quick connect ports are available. These housings can be used in applications such as pre and post filtration for Reverse Osmosis systems, undersink filtration, countertop systems, food service, ice machines and many more.

LIQUATEC FH09 SERIES NARROW FILTER HOUSINGS

are Tested and Certified by NSF International to NSF/ANSI Standard 42 for material and structural integrity requirements only.









Tested and Certified by NSF International to ANSI/NSF Standard 42 for material requirements only.


MATERIALS OF CONSTRUCTION

HOUSING

POLYPROPYLENE, SAN & LEXAN POLYPROPYLENE

- CAP • O-RING
- BUNA-N
- MAXIMUM TEMPERATURE 125°F (51.7°C)
- MAXIMUM PRESSURE 100 PSI (7 BAR)

PART NUMBER ORDERING GUIDE

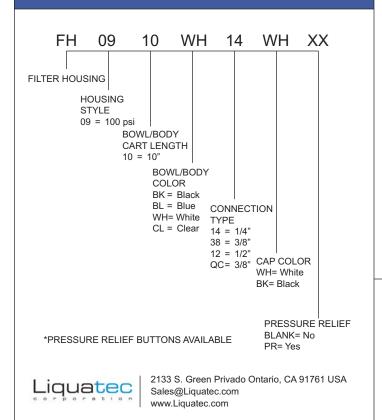

FH09 SERIES FILTER HOUSINGS

3/8" QUICK FITTING CONNECTION



APPLICATIONS

- Reverse Osmosis
- Residential Plumbing
- Photography
- Beverage
- Ice Makers
- Misting Units

DISTRIBUTED BY: