

Residential CA Cellulose Acetate Membrane Elements



Residential CA Cellulose Acetate Membrane Elements

Recognized as one of the industry's most reliable and highest performing membrane elements which deliver consistent quality and performance. Advanced membrane film technology and manufacturing processes allow these elements to deliver consistent results that water treatment equipment suppliers, distributors and dealers have come to rely on.

- 96% Nominal Salt Rejection
- Chlorine Tolerant
- Improved System Performance
- Superior Quality and Cost Savings
- Individually Tested and Sanitized
- Made in the U.S.A.



The Ultra Water
Treatment Solution.

Residential CA Cellulose Acetate Membrane Elements

CA (Cellulose Acetate) reverse osmosis membrane elements are the preferred element for applications which require chlorine in the feed and product water for disinfection purposes.

Operating Limits:

- Membrane Type: Cellulose Acetate
- Maximum Operating Temperature: 110°F (43°C)
- Maximum Operating Pressure: 125 PSI
- Maximum Feed Flow Rate: 1 GPM
- Minimum Concentrate Flow Rate: 4 x Permeate
- pH Range, Continuous Operation: 3 - 9
- Maximum Feed Water Turbidity: 1 NTU
- Maximum Feed Silt Density Index (SDI): 5 SDI

Features:


- 100% Wet Tested and Sanitized
- Accommodate all 2" x 12" Residential Membrane Housings
- Private Labeling Available
- Made in the U.S.A.



Product Specifications:

Part Number	Description	Applied Pressure PSI (BAR)	Permeate Flow Rate GPD	Nominal Salt Rejection (%)
200352	CA-1512-10	65 (4.48)	10	96
200353	CA-1812-16	65 (4.48)	16	96
200354	CA-1812-20	65 (4.48)	20	96

Permeate flow and salt rejection based on the following test conditions: 550 ppm Softened Tap Water, 77°F (25°C), 15% Permeate Recovery, 6.5 - 7.0 pH Range, and the specified applied pressure. Data taken after 30 minutes of operation. Maximum pressure drop for each element is 10 psi. Minimum salt rejection is 93%. Permeate flow for individual elements may vary +/- 15%.

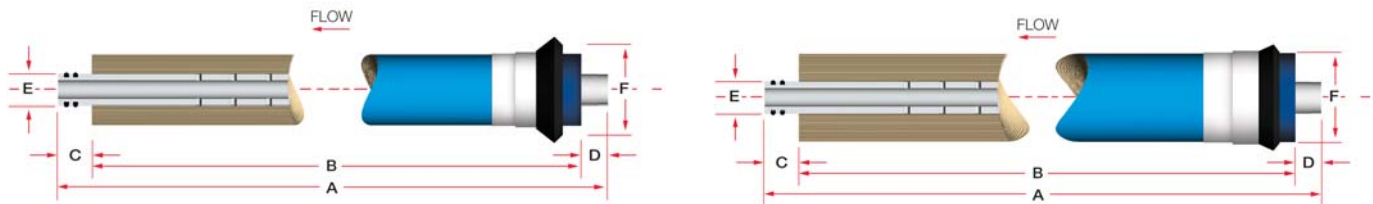

Dimensions (inches):

Description	A	B	C	D	E
CA-1512-10	11.740	.860	.930	1.500	10.000
CA-1812-16	11.740	.860	.930	1.775	10.000
CA-1812-20	11.740	.860	.930	1.775	10.000

Wet tested membrane elements must be kept sealed and moist when in storage. Drying out may occur and damage the membrane permanently. Prevent elements from freezing or being exposed to direct sunlight. Wet tested elements are vacuum sealed in a polyethylene bag containing 1.0% sodium meta-bisulfite and then packaged in a cardboard box. Discard the permeate for the first two hours of operation. The permeate flow (product water flow) varies with feed water temperature. Review a Temperature Correction Chart. For membrane warranty information, please contact manufacturer.

The manufacturer believes the information and data contained herein to be accurate and useful. The information and data are offered in good faith, but without guarantee, as conditions and methods of use of products are beyond the manufacturer's control. The manufacturer assumes no liability for results obtained or damages incurred through the application of the presented information and data. It is the user's responsibility to determine the appropriateness of the products for the user's specific end uses.

DISTRIBUTED BY: